

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 November 2004 (11.11.2004)

PCT

(10) International Publication Number  
**WO 2004/096622 A1**

(51) International Patent Classification<sup>7</sup>:  
7/00, 12/00 // A01D 34/64, A01B 69/00

B62D 3/02,

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/SE2004/000239

(22) International Filing Date: 23 February 2004 (23.02.2004)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

0301072-5

11 April 2003 (11.04.2003) SE

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): GGP  
SWEDEN AB [SE/SE]; Box 1006, S-573 28 Tranås (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): NYBAKKEN, Johannes [NO/NO]; P.B. 209, N-2381 Brumunddal (NO).


(74) Agent: AWAPATENT AB; Box 5117, S-200 71 Malmö (SE).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: STEERING DEVICE IN AN IMPLEMENT CARRIER

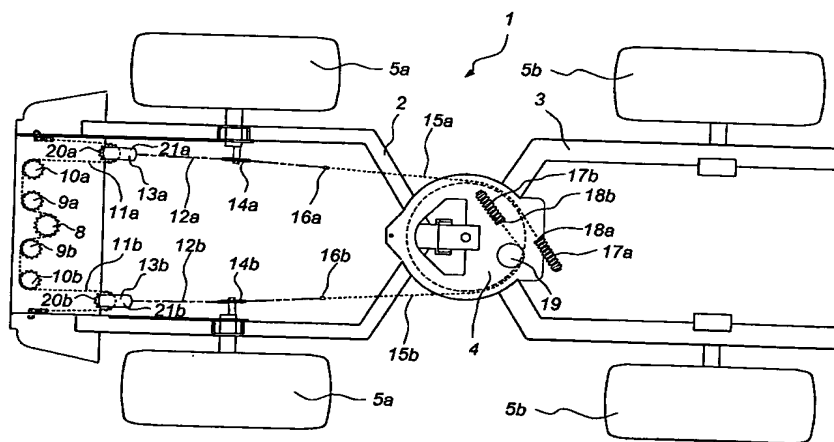

(57) Abstract: A device for steering a wheel assembly (3, 4, 5b) in an implement carrier (1) has a steering wheel (8) non-rotatably connected to a rotatable steering column and a transmission cable which is flexible in the plane of the steering wheel and extends over the steering wheel and forms, on both sides thereof, a cable run (11a, 11b). Two deflecting wheels (14a, 14b) arranged on both sides of the steering wheel (8) are located in a second and a third plane angled relative to the plane of the steering wheel. Two flexible steering cables (12a, 15a, 12b, 15b), which at one end are connected to the respective cable runs (11a, 11b), extend over the respective deflecting wheels (14a, 14b) and at the other end are connected to the wheel assembly (3, 4, 5b). The steering cables (12a, 15a, 12b, 15b) are connected to the respective cable runs (11a, 11b) by means of a coupling element (13a, 13b) consisting of a second deflecting wheel (20a, 20b) over which the cable run extends about 180°, and a deflecting wheel holder (21a, 21b) which supports this deflecting wheel (20a, 20b) rotatably about an axis, perpendicular to the plane of said steering wheel, and to which the steering cable (12a, 15a, 12b, 15b) is connected. The cable run (11a, 11b) is fixed at its end.